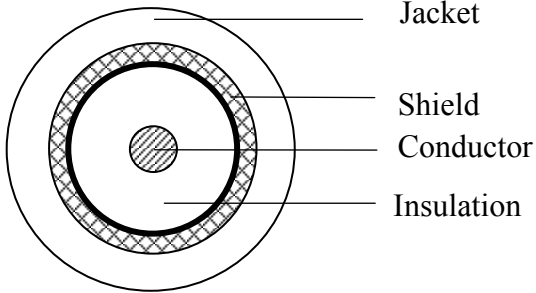


TECHNICAL SPECIFICATION

CABLE TYPE		RF-100 COAXIAL CABLE						
STRUCTURE								
Conductor	Composition(No./mm)	1/0.46mm						
	Material	Copper Coated Steel Wire						
	Outside Diameter (mm)	0.46±0.03mm						
Insulation	Material	Solid Polyethylene						
	Thickness (mm)	0.53mm						
	Nom. Diameter(mm)	1.52 ± 0.1mm						
Shield	Material	(1) Bonded Aluminum Foil			(2) Tinned Copper Wire			
	Construction	0.038mm			16x5/0.10mm			
	Coverage				95%			
	Diameter(mm)				0.10±0.008mm			
Jacket	Material	LEAD FREE PVC						
	Diameter(mm)	2.79 ± 0.10mm						
	Color	Black						
Printing	LOW LOSS 100 SERIES 50 OHMS							
ELECTRICAL CHARACTERISTIC								
Impedance	Ω	50 ± 3						
Insulation Resistance	MΩ / km	1000 ↑						
Capacitance	pF/M	101.1 ± 3						
Attenuation	Frequency(MHz)	30	150	450	900	1500	1800	2500
	dB/100M	12.9	29.4	51.9	74.9	98.7	109.0	130.6
<i>Nice Fountain Industrial Co., Ltd.</i>								
		DRWN.	Vivien Cheng				DRWN. No.:	
		CHKD.	C.H. Liu				4RF10008001001	
		APPD.	Vincent Shen				Date: FEB. 01, 2005	