
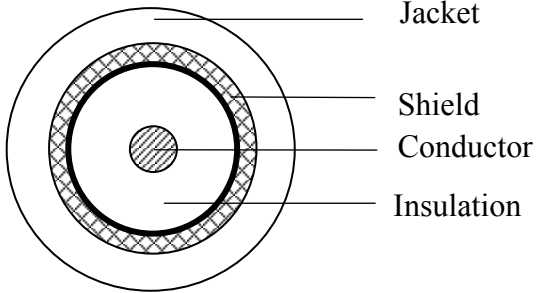


TECHNICAL SPECIFICATION

CABLE TYPE		RF-240 COAXIAL CABLE						
STRUCTURE								
Conductor	Composition(No./mm)	1/1.42mm						
	Material	Bare Copper Wire						
	Outside Diameter (mm)	1.42±0.03mm						
Insulation	Material	Gas Injected Foamed Polyethylene						
	Thickness (mm)	1.20mm						
	Nom. Diameter(mm)	3.81± 0.1mm						
Shield	Material	(1) Double Side Bonded AF			(2) Tinned Copper Wire			
	Construction	0.050mm			16*8/0.12mm			
	Picks/inch				90%			
	Diameter(mm)				0.12±0.008mm			
Jacket	Material	PVC						
	Diameter(mm)	6.1± 0.15mm						
	Color	Black						
Printing								
ELECTRICAL CHARACTERISTIC								
Impedance	Ω	50 ± 3						
Insulation Resistance	MΩ / km	1000 ↑						
Capacitance	pF/M	75± 3						
Attenuation	Frequency(MHz)	30	150	450	900	1500	1800	2500
	dB/100M	7.9	8.1	17.1	24	33.8	37.8	45.6
								
<i>Nice Fountain Industrial Co., Ltd.</i>		DRWN.	Grace Hsu				DRWN. No.:	
		CHKD.	C.H. Liu					
		APPD.	Vincent Shen				Date:APR.10, 2003	