

2.4G Panel Antenna 12dBi (PA-2450-12-01)



This panel antenna delivers extended access point range in a single floor environment ideally positioned in the corner of a building. It functions from point-to-point so that you can wirelessly connect LANs between the buildings in a campus-type environment.


Technical Information

Frequency :	2400 - 2483MHz
Gain:	12dBi
Polarization:	Vertical
Beamwidth deg:	Horz.65°Vert.28°
VSWR:	≤ 1.5:1
Impedance:	50 ohm

Dimensions

Size:	L275 x W90 x H30mm
Weight:	960g
Connector:	N-type / Female

- Designed for wireless LAN communications
- Mounts easy for outdoor or indoor application.
- Designed to obtain maximum gain
- Made with weatherproof and corrosion resistant



Hwa Yao Technologies Co., Ltd

華耀科技有限公司



NO.6 ,Ln.48, Nansing Rd., Yong Kang City, Tainan County 710, Taiwan, R.O.C.


Email: sales@hwayaotek.com.tw <http://www.hwayaotek.com.tw>

TEL: +886-6-2712809 FAX : +886-6-2712870



TESTING REPORT: 1. VSWR

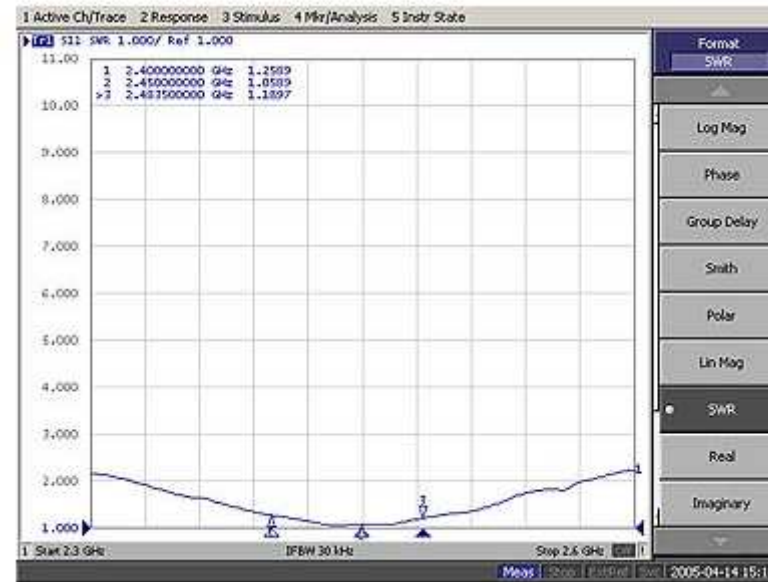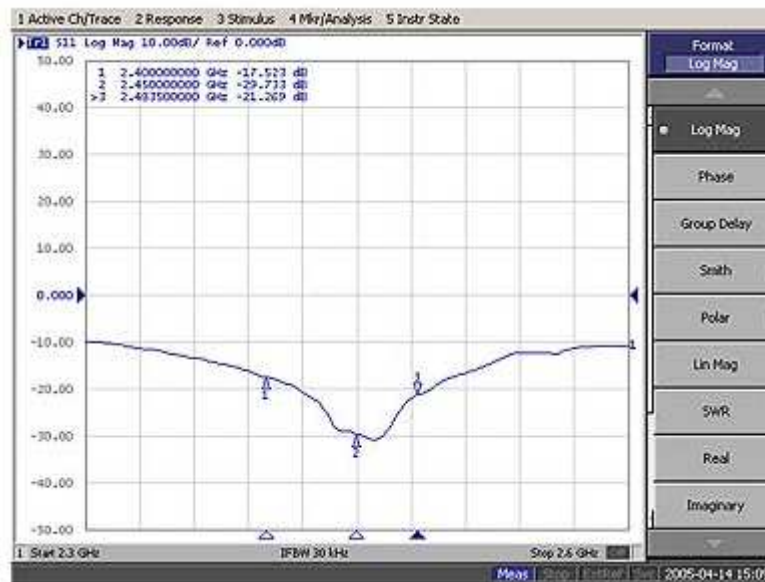



Hwa Yao Technologies Co., Ltd

華耀科技有限公司

NO.6 ,Ln.48, Nansing Rd., Yong Kang City, Tainan County 710, Taiwan, R.O.C.

Email: sales@hwayaotek.com.tw <http://www.hwayaotek.com.tw>

TEL: +886-6-2712809 FAX : +886-6-2712870



TESTING REPORT: 2.Pattern

