

## 2.4~2.5GHz MIMO PANEL Antenna II 11dBi for N FEMALE PAII-2450-11N-FM01

### APPLICATIONS AND FEATURES

#### Applications:

- 2.4~2.5 GHz Applications
- IEEE 802.11b, 802.11g, 802.11n MIMO Wireless LAN
- Public Wireless Hotspot
- Directional and multipoint applications
- Wi-Fi, RFID
- Wireless Video Systems
- Bluetooth

#### Features :

- RoHS Compliant
- The Weight is light
- Heavy Duty mounting
- Superior Performance
- Good appearance designs
- Outdoor antenna for public Hot spots
- Installed for vertical or horizontal polarization



### SPECIFICATIONS:

#### Electrical Specifications


Frequency Range	2400~2500MHz
V.S.W.R	≤ 1.5:1
Return Loss	≥ -14db
Antenna Type	Collinear
Gain	11dBi
Polarization	Vertical
Maximum Power	50W
Vertical Beam-with	8°
Horizontal Beam-with	90°
Impedance	50Ω
Connector	N female x2

#### Mechanical Specifications


Length	455mm
Diameter	130mm
Weight	650g
Wind Survival	> 120 MPH
Radome Material	White Fiberglass
Operating Temperature	-40°C to +80°C
Clamps	Multiple options
Mounting	Multiple options
RoHS Compliant	Yes

# TESTING REPORT PORT 1

## Return Loss

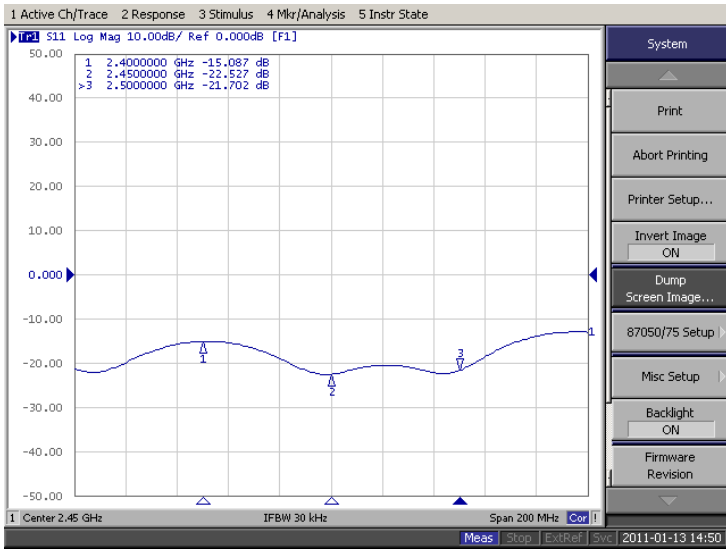


## V.S.W.R

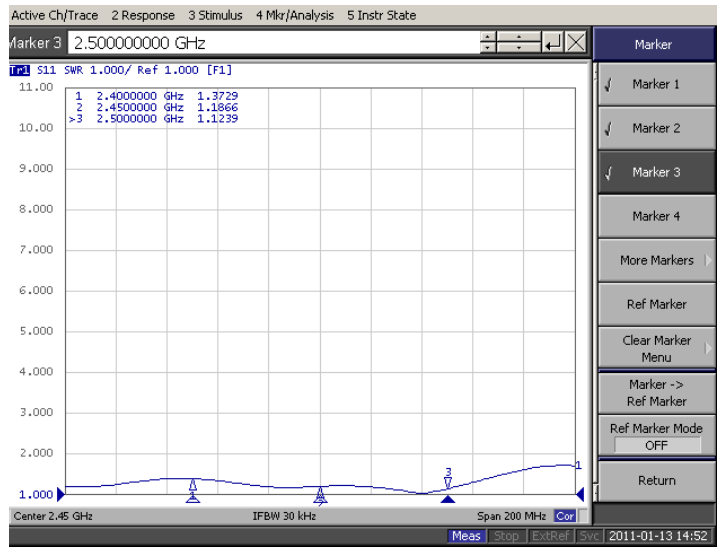


# TESTING REPORT PORT 2

## Return Loss

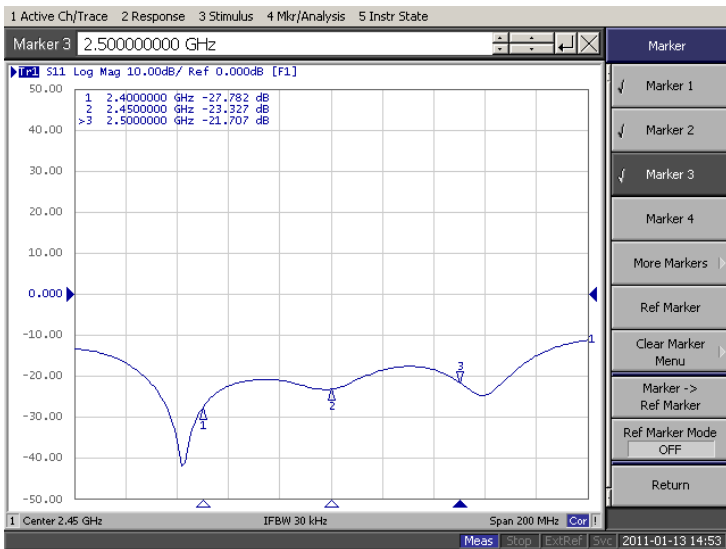


## V.S.W.R

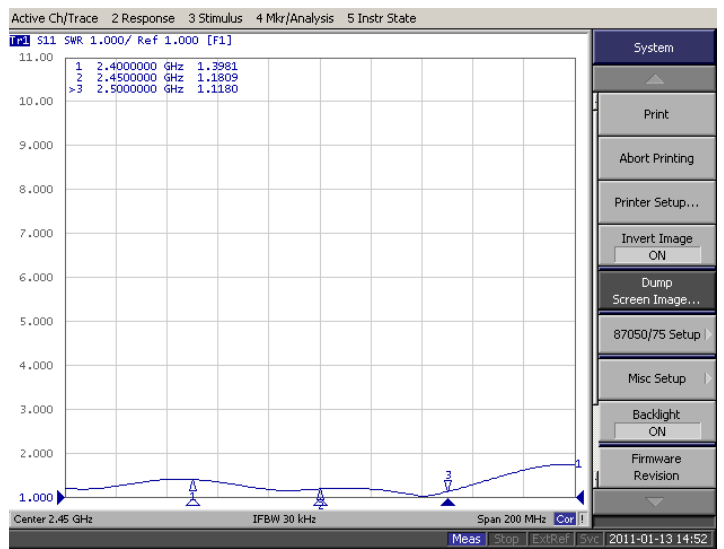


# Antenna Vertical & Horizontal Pattern

## Vertical

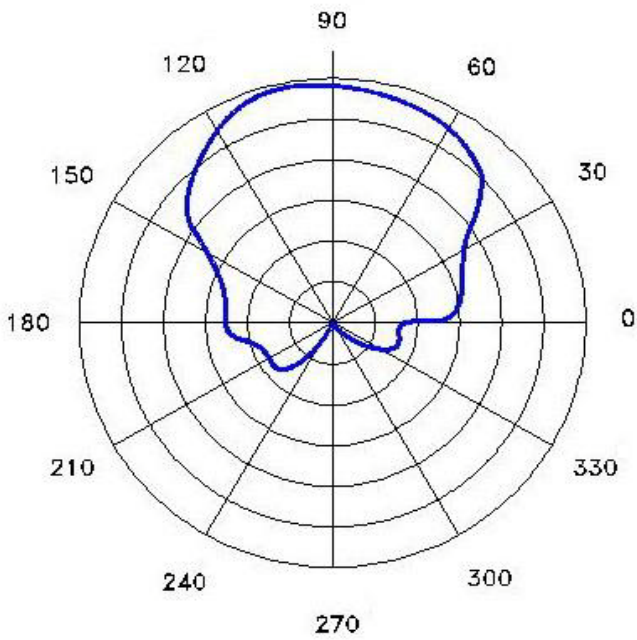

## Horizontal

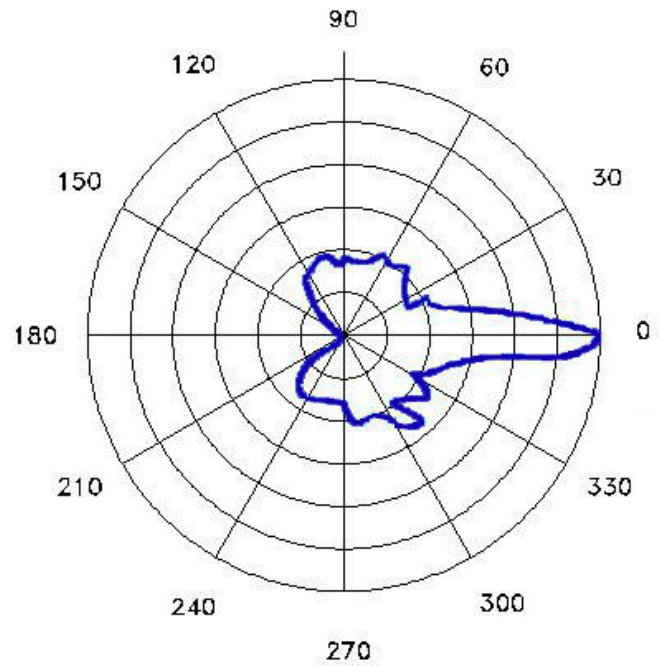

**Hwayaotek**

NO.6 ,Ln.48, Nansing Rd., Yong Kang City,  
Tainan County 710, Taiwan, R.O.C

TEL: +886-6-2712809  
FAX: +886-6-2712870  
<http://www.hwayaotek.com.tw>  
Email:sales@hwayaotek.com.tw