

2.4GHz USB PANEL Antenna 12dBi for 802.11N UTP-2450-12-23N



SPECIFICATIONS:

Antenna Electrical Specifications


Frequency Range	2400MHz - 2484MHz
V.S.W.R	≤1.5
Return Loss	≤-14db
Gain	12dBi Antenna
Antenna Type	Collinear
Polarization	Vertical or Horizontal
Maximum Power	50W
Vertical Beam-with	28°
Horizontal Beam-with	65°
Impedance	50Ω
Connector	USB 5m CABLE

Technical Information

Standard	IEEE 802.11b/g/n
RF Output Power(Typical)	802.11b: up to 25 ± 1 dBm 802.11g: up to 20 ± 1 dBm 802.11n: up to 19 ± 1 dBm
Data Rate	802.11b: 11, 5.5, 2 and 1 Mbps with auto-rate fall back 802.11g: 54, 48, 36, 24, 18, 12, 9 & 6Mbps 802.11n(20MHz): up to 72Mbps 802.11n(40MHz): up to 150Mbps
Size	L241x W90XH33mm
Weight	500g
Operation Voltage	5V

Category	Item	Description
General	Standards	IEEE 802.11b/g/n
	Data Rate	802.11b: 11, 5.5, 2 and 1 Mbps with auto-rate fall back 802.11g: 54, 48, 36, 24, 18, 12, 9 & 6Mbps 802.11n(20MHz): up to 72Mbps 802.11n(40MHz): up to 150Mbps
	OS Supported	Windows®2000, XP 32/64, Vista 32/64, Win7 32/64
Hardware	Channel	1~11 channels (North America) 1~13 channels (General Europe)
	Frequency Stability	2.400GHz ~ 2.484GHz
	Sensitivity	-95dBm @ 802.11b -92dBm @ 802.11g -90dBm @ 802.11n
	Power	5V DC
	Security	64/128bitWEP WPA(TKIP with IEEE 802.1x) WPA2(AES with IEEE 802.1x) WPA Mixed
	Operating Temp	0°C ~ +60°C
Environment Spec	Humidity	10% ~ 90% (Non-condensing)
	Storage Temperature	-20°C ~ 70°C ambient temperature

Return Loss

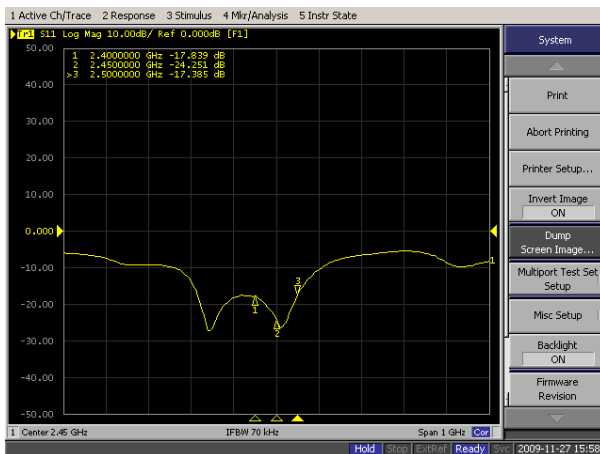

V.S.W.R

